


GL-WH01-1007M Auto-Darkening Welding Helmet

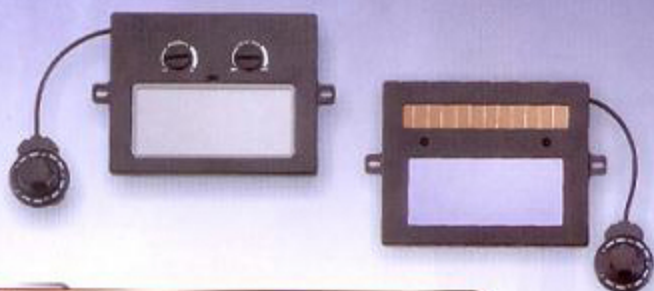

Technical Parameters

| | |
|---------------------------------|---|
| Model | GL-WH01-1007M |
| Auto Filter Model | GL-1007M |
| Auto Filter Size | 120 x 97 x 9 mm |
| Viewing Field | 90 x 40 mm |
| Shade Control | Light States: DIN 4 Dark States: DIN 9-13 Outside Adjustment |
| Switching Time | 0.6 ms |
| Delay Control Time | 0.1 - 0.8 sec adjustment |
| Sensitivity/ Delay Control Time | Internal Adjustment |
| Power Supply | Solar Cells Batteries & 3V Lithium Batteries |
| Lens Control | Auto-On, Auto-off 15 minutes (when not on welding) |
| Operating Temperature | -5°C to + 55°C |
| Arc Sensors | 2 Arc Sensors |
| Welding Helmet Shell Material | PP (Fireproof) |
| Welding Helmet Weight | 480 g |
| CE Approval | EN 166/175/379 CE |

GL-WH01-1009M Auto-Darkening Welding Helmet



Technical Parameters

| | |
|--------------------------------|---|
| Model | GL-WH01-1009M |
| Auto Filter Model | GL-1009M |
| Auto Filter Size | 110 x 90 x 9 mm |
| Viewing Field | 90 x 40 mm |
| Shade Control | Light States: DIN 4 Dark States: DIN 9-13 Outside Adjustment |
| Switching Time | 0.1ms |
| Delay Control Time | 0.1 - 0.8 sec adjustment |
| Sensitivity/Delay Control Time | Internal Adjustment |
| Power Supply | Solar Cells Batteries & 3V Lithium Batteries (Cr2032 2EA, Replaceable), LOW BATT LED |
| Lens Control | Lens Test Button*, Auto-On, Auto-off 15 minute (when not on welding) |
| Operating Temperature | -5°C to + 55°C |
| Grind Mode | Yes* |
| Arc Sensors | 2 Arc Sensors |
| Welding Helmet Shell Material | PP (Fireproof) |
| Welding Helmet Weight | 485 g |
| CE Approval | EN 166/175/379 CE |

