


# ALFRA ROTABEST® – RB 50 B

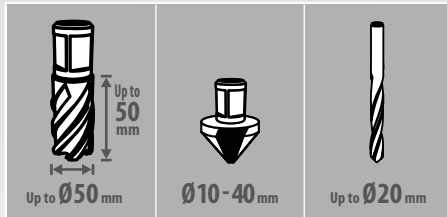

## RB 50 B

<b>Core drill dimensions</b>	Ø 12.0 - 50.0 mm
<b>Cutting depth</b>	50.0 mm
<b>Twist drill</b>	Ø 1.0 bis 16.0 mm with quick-release chuck MT2 up to Ø 20.0 mm with MK 2 DIN 345 direct
<b>Counterboring</b>	Ø 10.0 - 40.0 mm
<b>Tapping</b>	with tapping attachment: M3 - M20
<b>Arbors</b>	MT2
<b>Stroke</b>	190 mm
<b>Height adjustment</b>	100 mm
<b>2-speed gearbox</b>	1. Step 250 rpm
<b>Load speed</b>	2. Step 450 rpm
<b>Power consumption</b>	1,200 W
<b>Voltage</b>	230 V 50/60 Hz 110 V 50/60 Hz
<b>Magnetic adhesion strength</b>	12,000 N
<b>Tool force (10 mm)</b>	3,500 N
<b>Magnetic base</b>	92 x 220 mm
<b>Weight</b>	15.0 kg

<b>Gearboxes</b>	
<b>Oil bath gearbox</b>	✓
<b>Slides</b>	
<b>Infinitely adjustable</b>	✓
<b>Self-adjusting guide</b>	✓
<b>Operation</b>	
<b>Soft-touch grips</b>	✓
<b>Ergonomic switch keyboard</b>	✓
<b>Cable length 5 m</b>	✓
<b>Magnet</b>	
<b>Metal rings</b>	✓
<b>Performance and weight optimisation</b>	✓
<b>Made in Germany</b> ✓	

<b>Scope of delivery</b>	
<ul style="list-style-type: none"> <li>• Metal core drill RB 50 B</li> <li>• Incl. coolant system and tool holder with internal cooling</li> <li>• Carrying case</li> <li>• Drill spray</li> <li>• Seat belt</li> <li>• Operating Instructions</li> </ul>	



**MADE IN GERMANY**



**Prod.-No.**

ALFRA Rotabest® RB 50 B	230 Volt	18451
ALFRA Rotabest® RB 50 B	110 Volt	18451.110