

# Product Data Sheet



## B-P 220R

**EAN** 4047526255039

**ID** 255034

**Pressed steel fixed castor, medium duty brackets, with top plate fitting, Wheel with pneumatic tyres, with pressed steel rim**

### Bracket:

Made of pressed steel. Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.

### Wheels:

Pneumatic tyre with tube, outstandingly high operational comfort, exceptionally high floor preservation, PAH conform acc. to EU directive 2005/69/EC.

**Tread colours:** black

### Wheel centre/rim:

Made of pressed steel, with tubular steel hub, zinc-plated, blue-passivated, Cr6-free. Tyre mounted on rim.

**Wheel centre colour:** silver



### Rolling resistance

■ ■ ■ □ □ Good

### Operating noise

■ ■ ■ ■ ■ Excellent

### Floor surface preservation


■ ■ ■ ■ ■ Excellent

# Product Data Sheet



## Technical data

Profile		Rillenprofil
Plate size		140 x 110
Bolt hole spacing		105 x 75-80
Bolt hole Ø		11
Wheel Ø		220 mm (D)
Wheel width		65 mm (T2)
Load capacity		100 kg
Total height		255 mm (H)
Profile ribbed profile		R01
unit weight		2,4 kg
Temperature resistance to		-25 ° C
Temperature resistance to		50 ° C
tread and tyre hardness		65° Shore A
Bearing type		Roller bearing

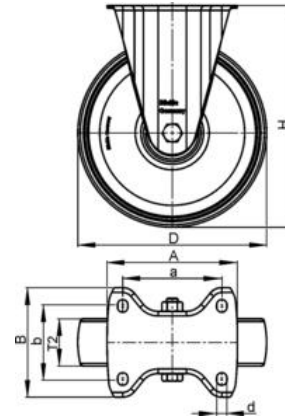

# Product Data Sheet



## Variants



### **B-P 220R-SG**

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Wheel with pneumatic tyres, with pressed steel rim