

Product Data Sheet



GTH 150/20K

EAN 4047526266479

ID 266478

Heavy duty wheel with Blickle Extrathane® polyurethane tread, with cast iron wheel centre


Wheels:

Made of high-quality, reaction-injected polyurethane-elastomer Blickle Extrathane®, low-noise operation, low rolling resistance, good floor preservation, very high abrasion resistance, high cut and tear propagation resistance, very good chemical connection with the wheel centre.

Tread colours: light brown

Wheel centre/rim: Made of grey cast iron, with grease nipple, lacquered.

Wheel centre colour: silver

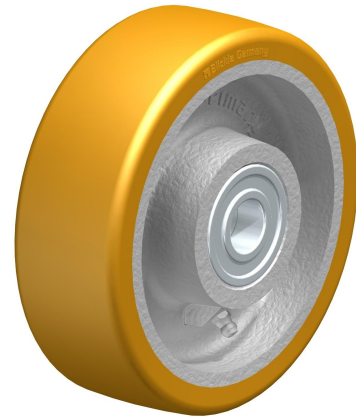

Rolling resistance

■■■■□ Very good

Operating noise

■■■■□ Good

Floor surface preservation

■■■■□ Good

Technical data

Wheel Ø		150 mm (D)
Wheel width		50 mm (T2)
Load capacity		750 kg
Axle bore Ø		20 mm (d)
Hub length		60 mm (T1)
unit weight		2,9 kg
Temperature resistance to		-25 ° C
Temperature resistance to		70 ° C
tread and tyre hardness		92° Shore A
Bearing type		Ball bearing

