

Product Data Sheet



B-PO 150R

EAN 4047526046828

ID 46821

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Nylon wheel

Bracket:

Made of pressed steel. Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.

Wheels: Made of high-quality, impact-resistant nylon. **Tread colours:** natural white

Wheel centre/rim: - Wheel centre colour: natural white



Rolling resistance

■■■■■ Excellent

Operating noise

■■□□□ Satisfactory












Floor surface preservation

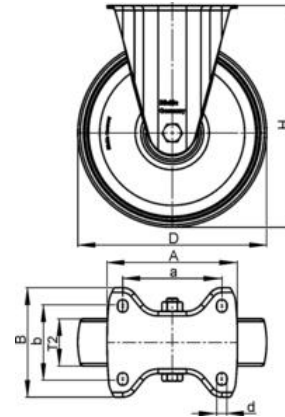
■■□□□ Satisfactory

Product Data Sheet



Technical data

Plate size		140 x 110
Bolt hole spacing		105 x 75-80
Bolt hole Ø		11
Wheel Ø		150 mm (D)
Wheel width		50 mm (T2)
Load capacity		400 kg
Total height		190 mm (H)
unit weight		1,3 kg
Temperature resistance to		-25 ° C
Temperature resistance to		80 ° C
tread and tyre hardness		70° Shore D
Bearing type		Roller bearing



Product Data Sheet



Variants



B-PO 150R-FA

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Nylon wheel



B-PO 150XR

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Nylon wheel



B-PO 150XR-FA

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Nylon wheel