

Product Data Sheet



B-PATH 125K-FK

EAN 4047526112318

ID 754190

Pressed steel fixed castor with top plate fitting, Wheel with thermoplastic polyurethane tread, with nylon wheel centre

Bracket:

Made of pressed steel. Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.

Wheels:

Made of high-quality thermoplastic polyurethane, low-noise operation, low rolling and swivelling resistance, good floor preservation, very high abrasion resistance, chemically bonded for an inseparable connection to the wheel centre.

Tread colours: dark grey

Wheel centre/rim:

Made of high-quality, impact-resistant nylon. Chemically bonded.

Wheel centre colour: grey



Rolling resistance

■ ■ ■ ■ □ Very good

Operating noise

■ ■ ■ □ □ Good












Floor surface preservation

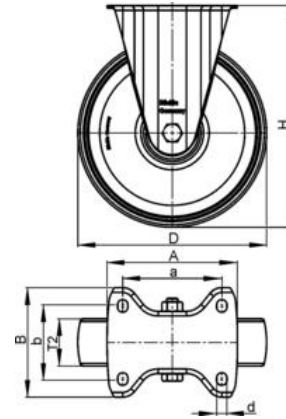
■ ■ ■ □ □ Good

Product Data Sheet



Technical data

Plate size		100 x 85
Bolt hole spacing		80 x 60
Bolt hole Ø		9
Wheel Ø		125 mm (D)
Wheel width		32 mm (T2)
Load capacity		200 kg
Total height		150 mm (H)
unit weight		0,7 kg
Temperature resistance to		-25 ° C
Temperature resistance to		70 ° C
tread and tyre hardness		94° Shore A
Bearing type		Ball bearing



Product Data Sheet



Variants



B-PATH 125K-ELS-FK

Pressed steel fixed castor with top plate fitting, Wheel with thermoplastic polyurethane tread, with nylon wheel centre