

# Product Data Sheet



## LIX-POSI 100G-OF

EAN 4047526072483

ID 744357

**Heat-resistant stainless steel swivel castor with top plate fitting, Heat-resistant Blickle TempLine® Comfort wheel with silicone rubber tread**

### Bracket:

Made of pressed high-quality, chromium-nickel stainless steel (Material No. 1.4301/AISI 304), with double ball bearing in the swivel head, strong central kingpin. The special Blickle dynamic riveting process of the swivel head results in smooth rolling characteristics, increased service life and the swivel head play is set specifically for high temperature applications. For environments with strict regulations on cleanliness, hygiene and temperature resistance, the swivel head is supplied without grease ('-OF') as standard. All parts such as balls, central kingpin and axle material are corrosion-resistant. Bolted wheel axle. Vibration-ground finished.

### Wheels:

Made of highly heat-resistant silicone rubber, very high operational comfort, low-noise operation, highly elastic, very good floor preservation, high abrasion resistance, characteristics that do not degrade over time, vulcanised on the wheel centre.

**Tread colours:** black

### Wheel centre/rim:

Made of high-quality, impact-resistant nylon. Heat-resistant. Vulcanised tyre.

**Wheel centre colour:** silver grey



### Rolling resistance

■ ■ ■ □ □ Good

### Operating noise

■ ■ ■ ■ □ Very good













### Floor surface preservation


■ ■ ■ ■ □ Very good

# Product Data Sheet



## Technical data

Plate size		100 x 85
Bolt hole spacing		80 x 60
Bolt hole Ø		9
Wheel Ø		100 mm (D)
Wheel width		40 mm (T2)
Load capacity		100 kg
Total height		125 mm (H)
Offset swivel castor		36 mm
unit weight		0,7 kg
Temperature resistance to		-25 ° C
Temperature resistance to		250 ° C
tread and tyre hardness		75° Shore A
Bearing type		Plain bore

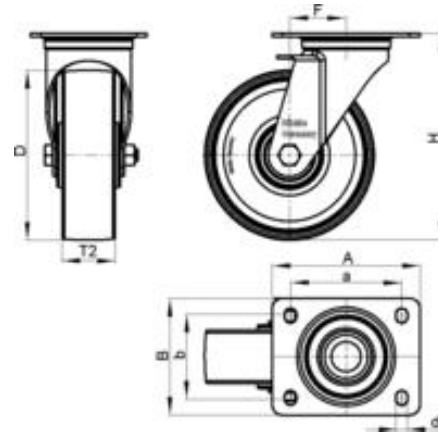

## Product Data Sheet



### Variants



#### LIX-POSI 100G-FI-OF

Heat-resistant stainless steel swivel castor with top plate fitting and 'stop-fix' brake, Heat-resistant Blickle TempLine® Comfort wheel with silicone rubber tread



#### LIX-POSI 100G-OF-XAT

Heat-resistant stainless steel swivel castor with top plate fitting, Heat-resistant Blickle TempLine® Comfort wheel with silicone rubber tread

#### LIX-POSI 100G-FI-OF-XAT

Bild nicht gefunden.