


ALFRA ROTABEST® – RB 35/50 X PICCOLO



MADE IN GERMANY

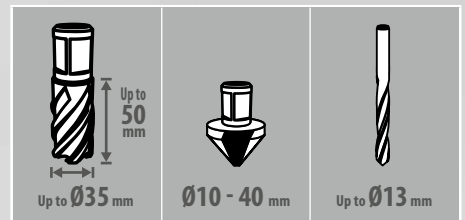

RB 35/50 X PICCOLO

| | |
|---|----------------------------------|
| Core drill dimensions | Ø 12.0 - 35.0 mm |
| Cutting depth | 50.0 mm |
| Twist drill | Ø 1.0 - 13.0 mm |
| Counterboring | Ø 10.0 - 40.0 mm |
| Arbors | Quick-release chuck |
| Stroke | 129 mm |
| Height adjustment | 86 mm |
| Gearbox - on-load speed | 450 rpm |
| Power consumption | 1,100 W |
| Voltage | 230 V 50/60 Hz 110 V 50/60 Hz |
| Tool force (10 mm) / magnetic adhesion strength | 2,100 N/9,000 N |
| Magnetic base | 70 x 185 mm |
| Weight | 11.5 kg |

| | |
|-------------------------------------|---|
| Motor | |
| Motor emergency stop | ✓ |
| Slides | |
| Infinitely adjustable | ✓ |
| Self-adjusting guide | ✓ |
| Operation | |
| Soft-touch grips | ✓ |
| Membrane keyboard | ✓ |
| Holder for Allen key | ✓ |
| Cable length 5 m | ✓ |
| Magnet | |
| Sensor/LED | ✓ |
| Metal rings | ✓ |
| Performance and weight optimisation | ✓ |
| Made in Germany | ✓ |

| | |
|--|--|
| Scope of delivery | |
| <ul style="list-style-type: none"> • Metal core drilling machine RB 35/50 X Piccolo • Carrying case • Seat belt • Coolant device • Operating Instructions • incl. 1 core drill free | |

ALFRA Rotabest® RB 35/50 X Piccolo 230 Volt
ALFRA Rotabest® RB 35/50 X Piccolo 110 Volt

Prod.-No.

18701

18701.110