


ALFRA ROTABEST® – RB 40 RL-E

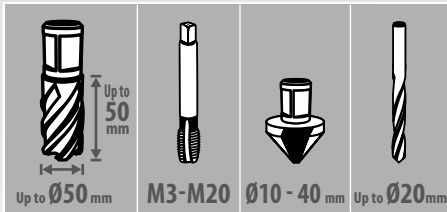

RB 40 RL-E

Core drill dimensions	Ø 12.0 - 50.0 mm
Cutting depth	50.0 mm
Twist drill	Ø 1.0 to 16.0 mm with quick-release chuck MT2 up to Ø 20.0 mm with MT 2 DIN 345 direct
Counterboring	Ø 10.0 - 40.0 mm
Tapping	with tapping chucks: M3 - M14 with tapping attachment M3 - M20
Arbors	MT2
Stroke	170 mm
Height adjustment	100 mm
2-speed gearbox	right / left
	1. Step 100 - 250 rpm 2. Step 180 - 450 rpm
Power consumption	1,200 W
Voltage	230 V 50/60 Hz
	110 V 50/60 Hz
Tool force (10 mm)/magnetic adhesion strength	3,800 N/16,000 N
Magnetic base	92 x 238 mm
Weight	16.0 kg

Motor	
Smooth start	✓
Full-wave control electronics	✓
Right/left run	✓
Overload protection	✓
Gearboxes	
Oil bath gearbox	✓
Slides	
Infinitely adjustable	✓
Operation	
Soft-touch grips	✓
Membrane keyboard	✓
Magnet	
Metal rings	✓
Made in Germany	✓

Scope of delivery	
<ul style="list-style-type: none"> • Metal core drill RB 40 RL-E • Carrying case • Coolant device • Drill spray • Quick-release chuck 1 to 16 mm, MT2 • Chip hook • Seat belt • Operating Instructions • incl. 1 core drill free 	



MADE IN GERMANY



Prod.-No.

ALFRA Rotabest® RB 40 RL-E	230 Volt	18611
ALFRA Rotabest® RB 40 RL-E	110 Volt	18611.110