


# ALFRA ROTABEST® – RB 60 RL-E



**MADE IN GERMANY**

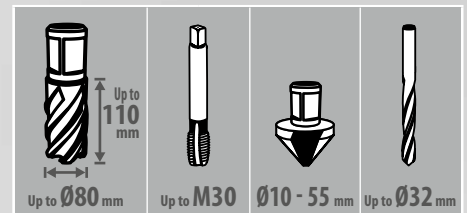

## RB 60 RL-E

<b>Core drill dimensions</b>	Ø 12.0 - 80.0 mm / Ø 20.0 - 50.0 mm (extra long 110 mm)
<b>Cutting depth</b>	50.0 mm / 110.0 mm
<b>Twist drill</b>	Ø 1.0 - 16.0 mm with drill chuck Up to Ø 32.0 mm with MT <sub>3</sub> DIN 345
<b>Counterboring</b>	Ø 10 - 55.0 mm
<b>Tapping</b>	with tapping chucks: Up to M30 with tapping attachment: Up to M30
<b>Arbors</b>	MT <sub>3</sub>
<b>Stroke</b>	190 mm
<b>Height adjustment</b>	60 mm
<b>4-speed gearbox</b>	right / left 1. Step 50 - 110 rpm 2. Step 75 - 175 rpm 3. Step 105 - 245 rpm 4. Step 165 - 385 rpm
<b>Power consumption</b>	1,800 W
<b>Voltage</b>	230 V 50/60 Hz 110 V 50/60 Hz
<b>Tool force (10 mm)/ magnetic adhesion strength</b>	4,200 N/20,000 N
<b>Magnetic base</b>	92 x 238 mm, 30° adjustable right and left, 10 mm front and back
<b>Weight</b>	22.0 kg

<b>Motor</b>	
<b>Smooth start</b>	✓
<b>Full-wave control electronics</b>	✓
<b>Right/left run</b>	✓
<b>Overload protection</b>	✓
<b>Gearboxes</b>	
<b>Oil bath gearbox</b>	✓
<b>Mech. Slip clutch</b>	✓
<b>Slides</b>	
<b>Infinitely adjustable</b>	✓
<b>Operation</b>	
<b>Soft-touch grips</b>	✓
<b>Membrane keyboard</b>	✓
<b>Magnet</b>	
<b>Metal rings</b>	✓
<b>Made in Germany</b>	✓

<b>Scope of delivery</b>	
<ul style="list-style-type: none"> <li>• Metal core drill RB 60 RL-E</li> <li>• Carrying case</li> <li>• Coolant device</li> <li>• Drill spray</li> <li>• Quick-release chuck 1 to 16 mm, MT<sub>3</sub></li> <li>• Chip hook</li> <li>• Seat belt</li> <li>• Operating Instructions</li> <li>• <b>incl. 1 core drill free</b></li> </ul>	

ALFRA Rotabest® RB 60 RL-E	230 Volt	<b>18626</b>
ALFRA Rotabest® RB 60 RL-E	110 Volt	<b>18626.110</b>

**Prod.-No.**