


# ALFRA ROTABEST® – V 32

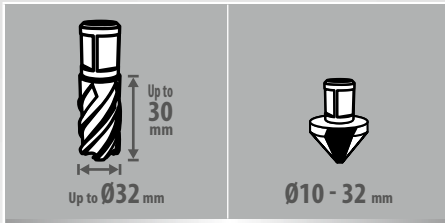

## V 32

Core drill dimensions	Ø 12.0 - 32.0 mm
Cutting depth	30.0 mm
Counterboring	Ø 10.0 - 32.0 mm
Arbors	19 mm Weldon shank
1-speed gearbox	450 rpm
Stroke	45 mm
Power consumption	900 W
Voltage	230 V 50/60 Hz 110 V 50/60 Hz
Tool force (10 mm)/ magnetic adhesion strength	2,100 N / 16,000 N
Magnetic base	95 x 200 mm
Weight	12.5 kg

Motor	
Compact, lying	
Gearboxes	
Compact mitre gear	
Slide	
2-sided column guide	
Operation	
Space-saving - through ratchet	
Magnet	
Metal rings	✓
Performance and weight optimisation	✓
Made in Germany	✓

Scope of delivery	
<ul style="list-style-type: none"> <li>• Metal core drilling machine V 32</li> <li>• Coolant pressure bottle</li> <li>• Carrying case</li> <li>• Allen key for Weldon arbor</li> <li>• Seat belt</li> <li>• Ejector pin 6.35 x 74 mm (specially for Rotabest® V32)</li> <li>• Operating instructions</li> <li>• <b>incl. 1 core drill free</b></li> </ul>	



 **MADE IN GERMANY**



## Prod.-No.

ALFRA Rotabest® V32	230 Volt	18710
ALFRA Rotabest® V32	110 Volt	18710.110