

# Product Data Sheet



## B-ALEV 150K

**EAN** 4047526631178

**ID** 631176

**Pressed steel fixed castor, medium duty brackets, with top plate fitting, Heavy duty wheel with elastic solid rubber tyres 'Blickle EasyRoll', with aluminium wheel centre**

### Bracket:

Made of pressed steel. Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.

### Wheels:

Made of high-quality elastic solid rubber, in smooth rolling quality "Blickle EasyRoll", very high operational comfort, low-noise operation, low rolling resistance, very good floor preservation, vulcanised on the wheel centre.

**Tread colours:** black

**Wheel centre/rim:** Made of die-cast aluminium. Vulcanised tyre.

**Wheel centre colour:** silver grey



### Rolling resistance

■■■■□ Very good

### Operating noise

■■■■□ Very good

### Floor surface preservation


■■■■□ Very good

# Product Data Sheet



## Technical data

Plate size		140 x 110
Bolt hole spacing		105 x 75-80
Bolt hole Ø		11
Wheel Ø		150 mm (D)
Wheel width		50 mm (T2)
Load capacity		400 kg
Total height		190 mm (H)
unit weight		2,1 kg
Temperature resistance to		-25 ° C
Temperature resistance to		80 ° C
tread and tyre hardness		65° Shore A
Bearing type		Ball bearing

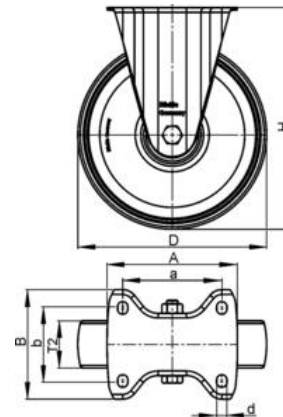

# Product Data Sheet



## Variants



### **B-ALEV 150K-SG**

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Heavy duty wheel with elastic solid rubber tyres 'Blickle EasyRoll', with aluminium wheel centre