

# Product Data Sheet



## LX-POTH 200XK

EAN 4047526074166

ID 74161

**Stainless steel swivel castor, medium duty brackets, with top plate fitting, Wheel with thermoplastic polyurethane tread, with heavy nylon wheel centre, non-marking, non-staining**

### Bracket:

Made of pressed high-quality, chromium-nickel stainless steel (Material No. 1.4301/AISI 304), with double ball bearing in the swivel head, strong central kingpin, swivel head seals. The special Blickle dynamic riveting process of the swivel head results in minimal swivel head play and smooth rolling characteristics with an increased service life achieved by the work hardening of the ball race grooves. All parts incl. axle material are corrosion-resistant. Bolted wheel axle. Vibration-ground finished.

### Wheels:

Made of high-quality thermoplastic polyurethane, high operational comfort, low-noise operation, low rolling and swivelling resistance, good floor preservation, very high abrasion resistance, chemically bonded for an inseparable connection to the wheel centre.

**Tread colours:** dark grey

**Wheel centre/rim:** Made of high-quality, impact-resistant nylon.

**Wheel centre colour:** natural white

**Variant:** non-marking, non-staining



### Rolling resistance

■■■■□ Very good

### Operating noise

■■■■□ Good













### Floor surface preservation

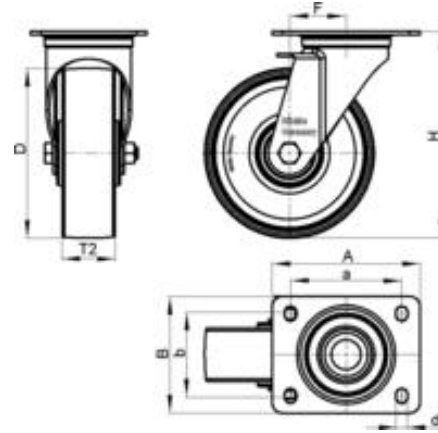
■■■■□ Good

# Product Data Sheet



## Technical data

Plate size		140 x 110
Bolt hole spacing		105 x 75-80
Bolt hole Ø		11
Wheel Ø		200 mm (D)
Wheel width		50 mm (T2)
Load capacity		400 kg
Total height		235 mm (H)
Offset swivel castor		65 mm
unit weight		2,6 kg
Temperature resistance to		-25 ° C
Temperature resistance to		70 ° C
tread and tyre hardness		94° Shore A
Bearing type		Ball bearing



# Product Data Sheet



## Variants



### LX-POTH 200XK-FI

Stainless steel swivel castor, medium duty brackets, with top plate fitting and 'stop-fix' brake, Wheel with thermoplastic polyurethane tread, with heavy nylon wheel centre



### LX-POTH 200XK-ST

Stainless steel swivel castor, medium duty brackets, with top plate fitting and 'stop-top' brake, Wheel with thermoplastic polyurethane tread, with heavy nylon wheel centre